


FIG. 1
SETTING 'A' WITH BUTT OF POLE RESTING ON OR PENETRATING SOLID EARTH AT NORMAL SETTING DEPTH

CRIBBING HEIGHT	BOLTS REQUIRED
60cm	12
120cm	30
180cm	48

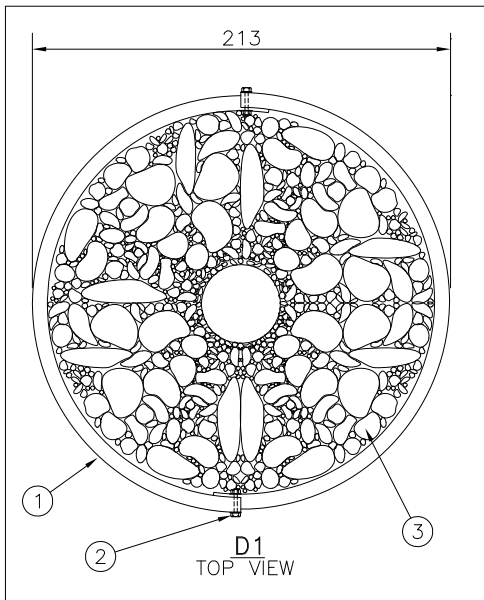

- NOTES:**
- HEIGHT OF CRIB WILL VARY WITH POLE HEIGHT AND DEPTH OF PENETRATION OF BUTT INTO SOLID EARTH. MINIMUM HEIGHT OF CRIB IS 60cm.
 - SEE SETTING 'A' ON DL4-201-0500 FOR CRIB HEIGHT.
 - SEE SUB-SECTION 4-2 FOR NORMAL SETTING DEPTH.

PARTS LIST			
PART No.	MM No.	DESCRIPTION	QTY.
1	30000793	CRIBBING, 7' DIAMETER x 2'	A/R
2	MM#	BOLT ASSEMBLY 1/2"	*
3	MM#	FIELD STONE OR GRAVEL OR	A/R
	30035627	GABION STONE, 200mm (8") OR	
4	30035623	CRUSHER RUN, 100mm (4"), GRAN. "B" TYPE II	1
	MM#	WOOD POLE	

MM# = REFER TO SECTION 16 ONLY | A/R = AS REQUIRED
* = SEE TABLE 1

ALL DIMENSIONS ARE IN CENTIMETRES UNLESS STATED OTHERWISE

Rev No.	Date	Revision Particulars	dwn	ckd	des	app
02	AUG 2021	UPDATED TABLE FORMAT. UPDATED NOTE 2 AND ADDED NOTE 3. CHANGED MAIN FIGURE TO FIG. 1 AND CHANGED TOP VIEW TO 'D1'. UPDATED PART 3. UPDATED TO NEW DRAWING NUMBERING FORMAT. FOR PREVIOUS REVISIONS REFER TO DL4-202-R1.	LS	PC	JX	MM
01	AUG 2014	REMOVED NOTE 1 REFERENCE TO TIMBERS	SO	PC		

Drawn By: BA	Checked By:	Designed By:	Design Approved By: *
Scale:	Date: (yyyy/mm/dd) *	Pole ID:	



© Copyright Hydro One Networks Inc. All rights reserved. This drawing may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film, or other distribution and storage media or used in any information storage or retrieval system outside of Hydro One Networks Inc., without the written consent of Hydro One Networks Inc.
Information contained in this drawing is considered to be confidential. Recipients shall only use the drawing for its intended purpose and shall take necessary measures to prevent disclosure or transmittal to outside parties.

Title:
SWAMP CRIBBING WITH STEEL CULVERT SECTION FOR WOOD POLES

Drawing No.
DL4-202-0500

Rev. No.
02

TITLE BLOCK REV 02 – AUGUST 2014